


RECOMMENDED USES

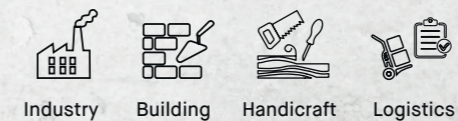

Air Mesh - High-breathable and resistant inner lining

Inner heel in high microfiber abrasion resistance

Collar and tongue in polyester fabric High tenacity RipStop

Special HDRY membrane, waterproof and breathable sealed directly to the upper thanks to the innovative 3D lamination process

High visibility 3M insert in the heel and in the lateral collar

Upper with quality materials for greater wear resistance

Punto Flex - Special technical solution that allows the foot to bend correctly

Deep self-cleaning grooves

Protection class (S3) and performance (WR)

High density microfiber reinforcement

Non-slip grooves for ladders



Stabilizer - Stabilizer arch inside the sole for correct foot movement

PU heel protector



AP Zero - Lightweight, ultra-flexible, anti-perforation insole board



HSA - Maximum heel shock-absorption

Double-density PU sole with maximum abrasion resistance and softer midsole for added comfort

A wide fit for greater comfort

ALcap - Lightweight, impact-resistant aluminium toe cap



HIT 250 MID WR HDRY

219441 AG1

STANDARD	SIZE
S3 SRC WR	38/48
COLOURS	WEIGHT
Asphalt	590 gr
All Black	
Radiant Yellow	
ELECTRIC CATEGORY	FIT
Antistatic	11

COMPONENTS

- Upper:** Special HDRY membrane, waterproof and breathable sealed directly to the upper thanks to the innovative 3D lamination process.
- Upper lining:** Breathable mesh fabric with durable microfiber heel abrasion.
- Toe-cap:**
 - Aluminium toe-cap with large internal space for improved toe comfort.
 - 200 Joule impact protection.
 - Compression protection 1,500 kg.
- Anti-intrusion insole:** Made of anti-perforation, absorbent, abrasion- and flaking resistant fabric.
- Sole:** Made of antistatic bidensity polyurethane, directly injected onto the upper with electrostatic charge dissipation capacity.
- Tread:** High density, non-slip (SRC), abrasion- and hydrocarbon resistant.
- Midsole:** Low-density, comfortable and shockproof.

MODEL DESCRIPTION

MID cut footwear, waterproof and breathable thanks to the special HDRY membrane laminated directly to the upper in greased nubuk water-repellent. Breathable mesh fabric lining with microfiber heel abrasion resistant. Antistatic footwear with non-slip and anti-shock sole.

RECOMMENDED USES

Industry, building, handicraft, logistics.

USE AND MAINTENANCE

Make sure the shoes are in good condition before each use. Take care to regularly clean them. Do not use aggressive products such as petrol, acids and solvents that could affect their quality, safety and durability.